

T-108

TRUCK MOUNTED
HYDRAULIC DRILLING RIG



T-108

TRUCK MOUNTED HYDRAULIC DRILLING RIG

A new model

T-108 is a drill unit designed to be fast, highly productive and easy to operate. It's a fully hydraulic drilling rig mounted on standard, heavy duty truck. Thanks to its power, reliability, and novel configuration T-108 meets the needs for a highly capable, easily mobilized drilling rig.

Features of T-108:

- All States no transport permits
- Max. weight 27.2 tons including truck
- All position drilling
- Sliding cradle and outriggers on rigid sub-frame
- Pull down system 1.8 m
- Locking kelly or friction kelly (3 or 4 elements)
- Max drilling depth: 30 m
- New rotary: max torque 100 kNm
- Cummins 6BT 5.9 C engine with sound proofed housing
- Enclosed air conditioned operator cab
- Electronic depthmeter and inclinometer

Optional features:

- Low head room version
- Extended depth, heavy version
- Tieback capability

Large diameter bored pile

Max. pile diameter	mm	1800
Pile max. depth	m	30
Max nominal torque	kNm	100 @ 35 MPa (9 rpm)
Max drilling speed	rpm	43
Spin - off speed	rpm	178
Main winch nominal line pull (ISO M5 - L2 - T5)	kN	102
Service winch nominal line pull (ISO M5 - L2 - T5)	kN	41
Engine	Type	CUMMINS 6BT 5.9C-30-T
Installed power	kW (HP)	116 (156) @ 2200 rpm
Cylinder crowd	kN	73.5 / 124
Cylinder stroke	mm	1800
Approx.weight w/o truck	ton	16

The nominal values are referred to 100% total efficiency.


Friction kelly bar – Ø 324 mm

elements n°	length m	depth m	weight ton
3x	7,0	18,0	1,8
4x	7,0	24,0	2,4
5x	7,0	30,0	3,0

Mechanical kelly bar – Ø 324

elements n°	length m	depth m	weight tonn
3x	7,0	18,0	1,8
4x	7,0	24,0	2,4


- 1 - **Rotating turret** with Cummins diesel engine and sound proofed canopy, mounted on sliding cradle.
- 2 - **Winch** units 102 kN and 41 kN
- 3 - **Sliding cradle:** 1000 m horizontal stroke
- 4 - **Self-erecting mast** withstanding the full torque all over the length. It's composed by one single element including sheave cathead.
- 5 - **Cathead** with service jib.
- 6 - **Crowd system:** 1,8 m stroke hydraulic cylinder.
- 7 - **100 kNm torque rotary** table c/w two hydraulic motors and reducers.
- 8 - **Telescopic kelly bar** with guide connection to mast with friction or mechanical locking type (see chart).
- 9 - **Four hydraulic stabilizers** mounted on sub-frame.

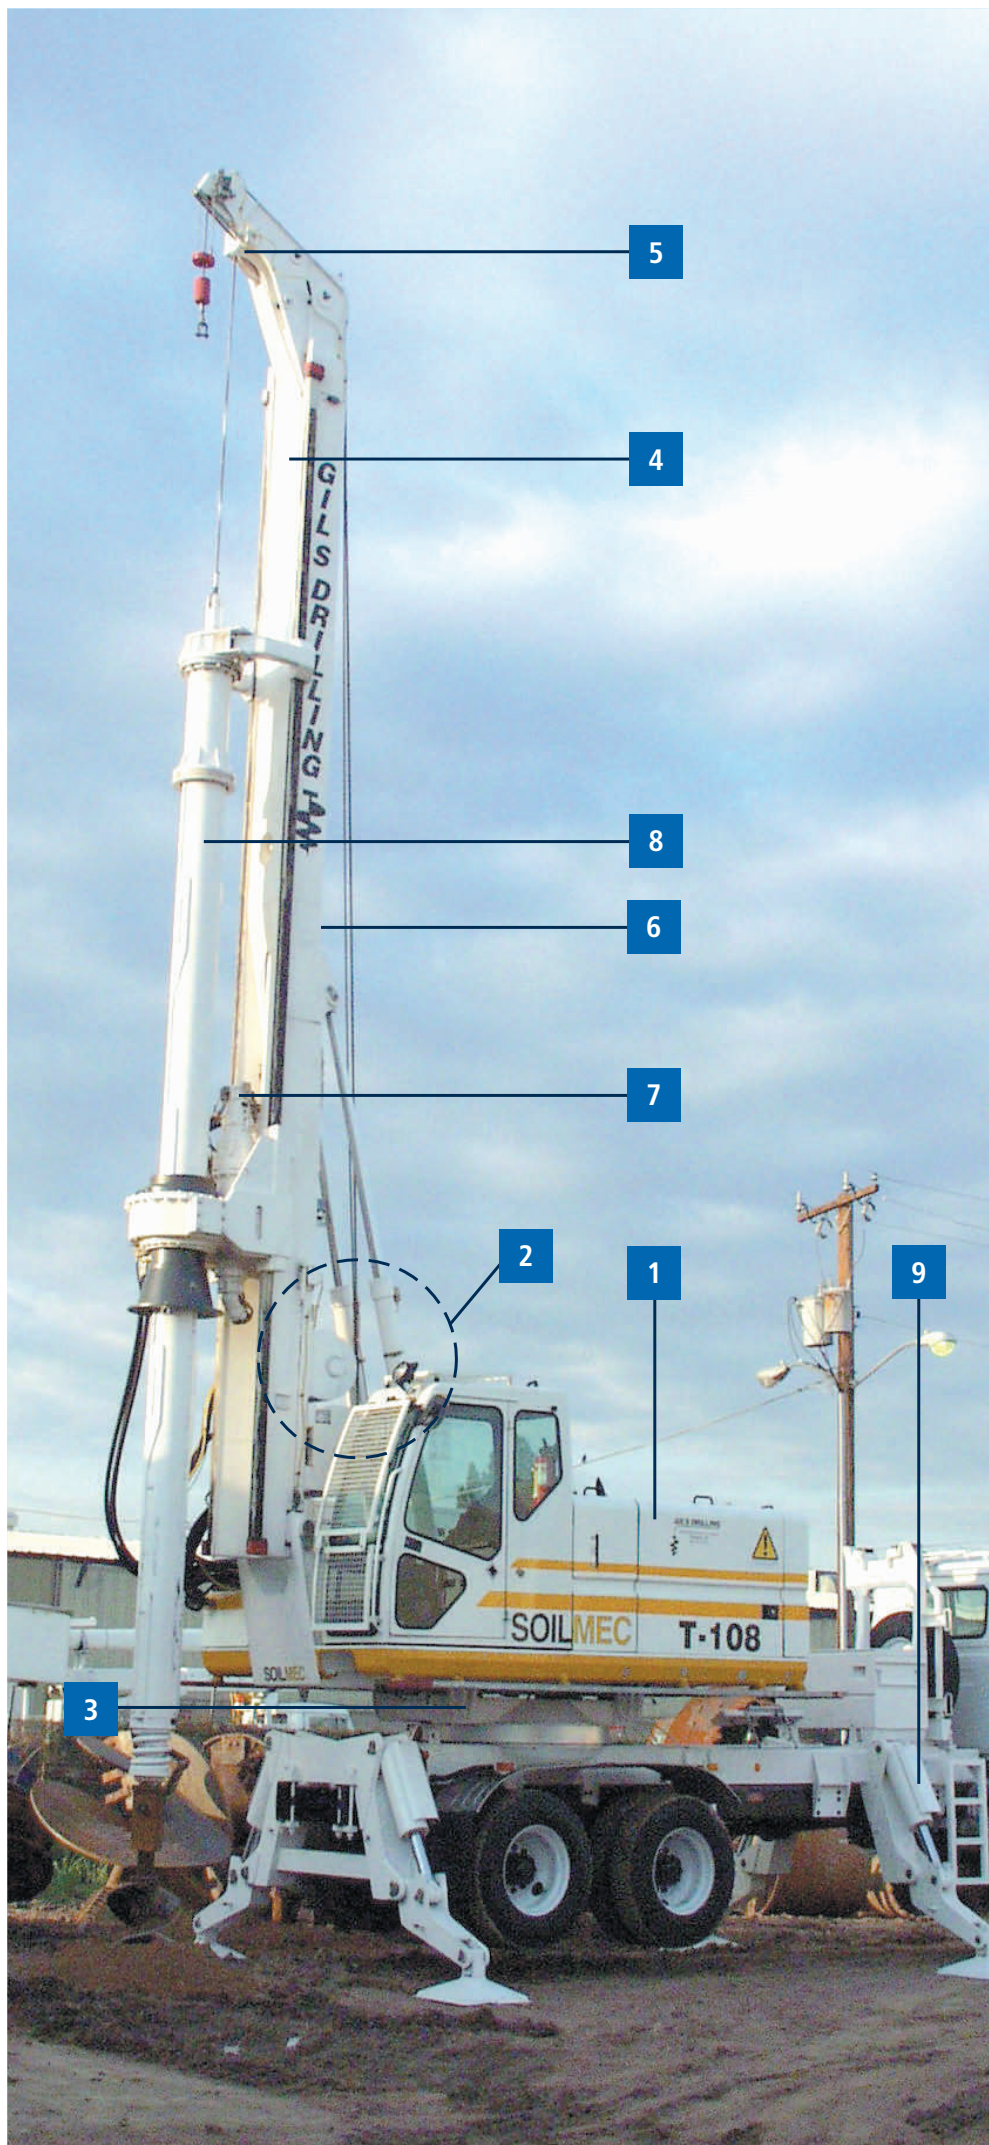

T-108

TRUCK MOUNTED HYDRAULIC DRILLING RIG

Working Condition

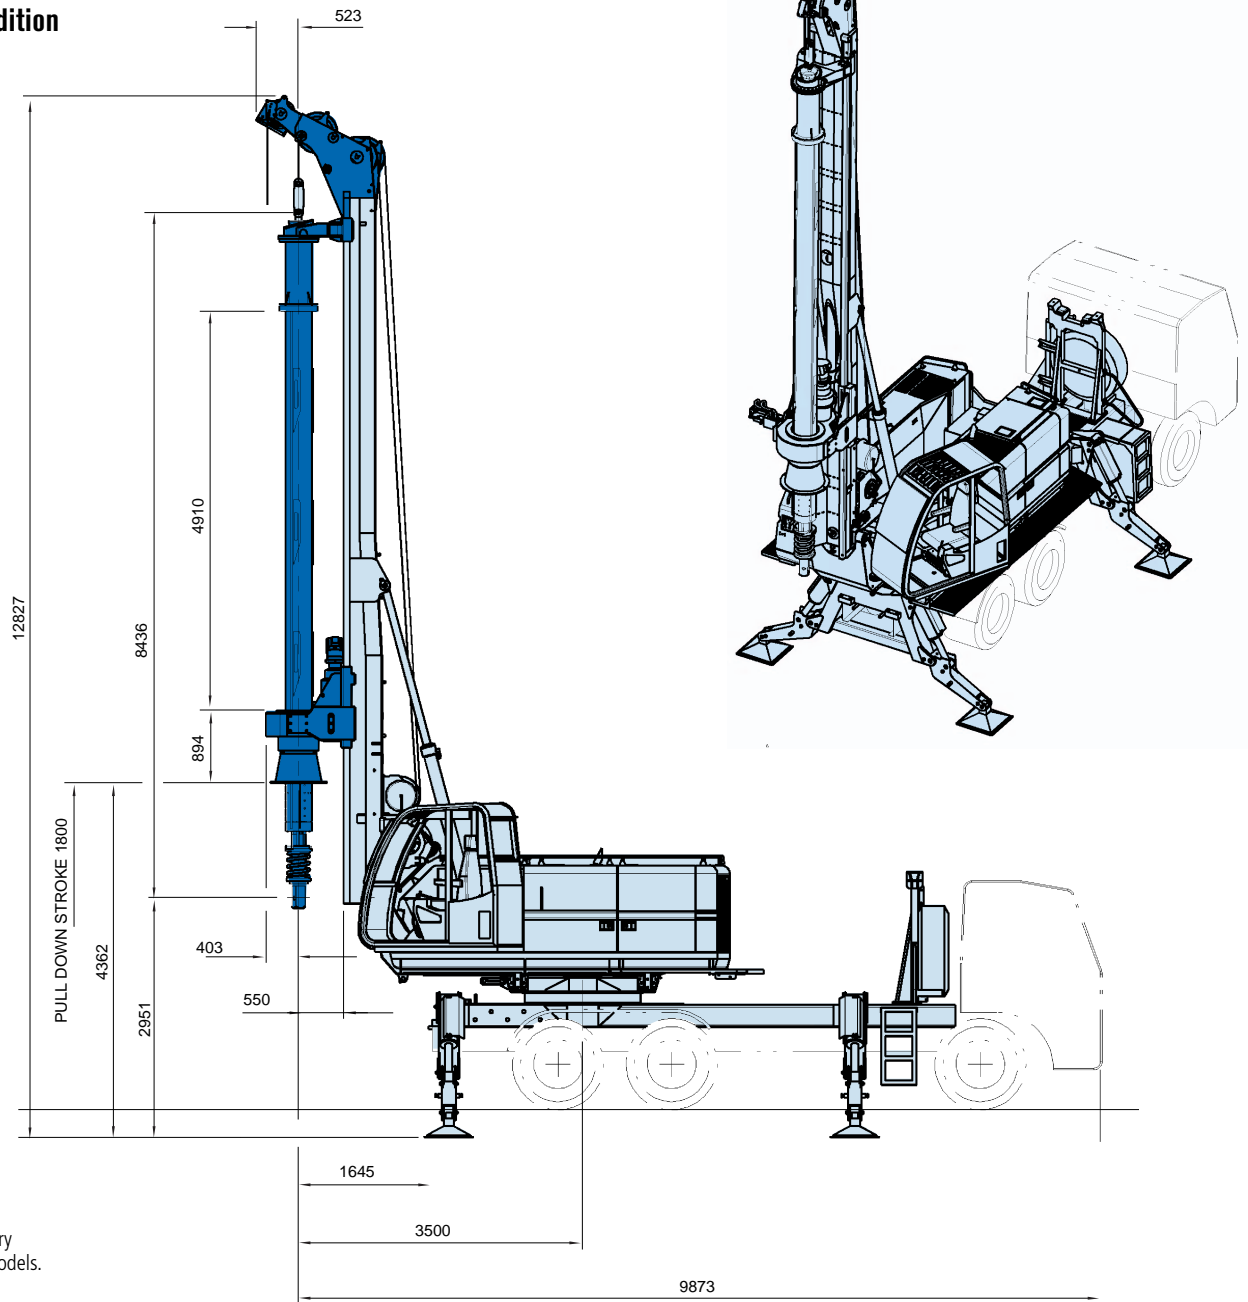


Truck dimensions can vary according to different models.

Pictures





TRUCK MOUNTED HYDRAULIC DRILLING RIG

Drilling Area

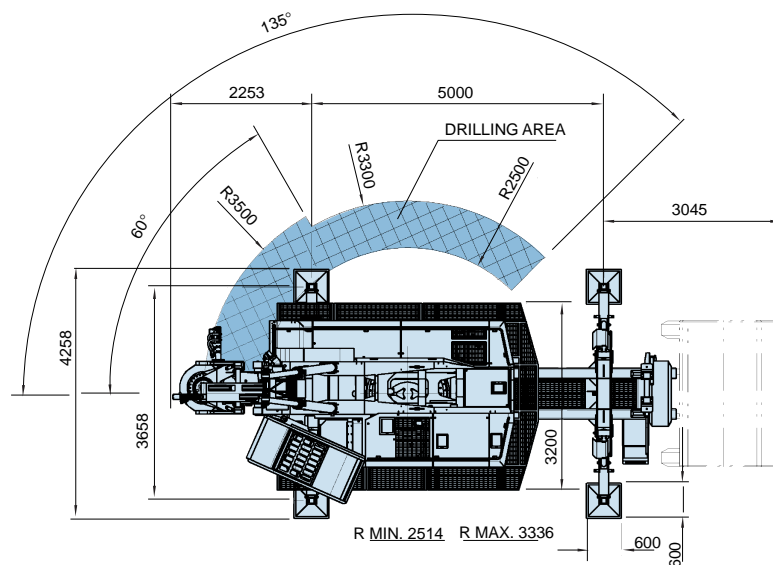

Transport Condition

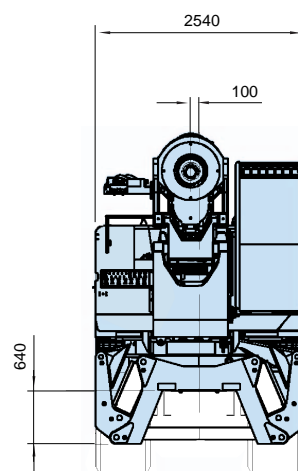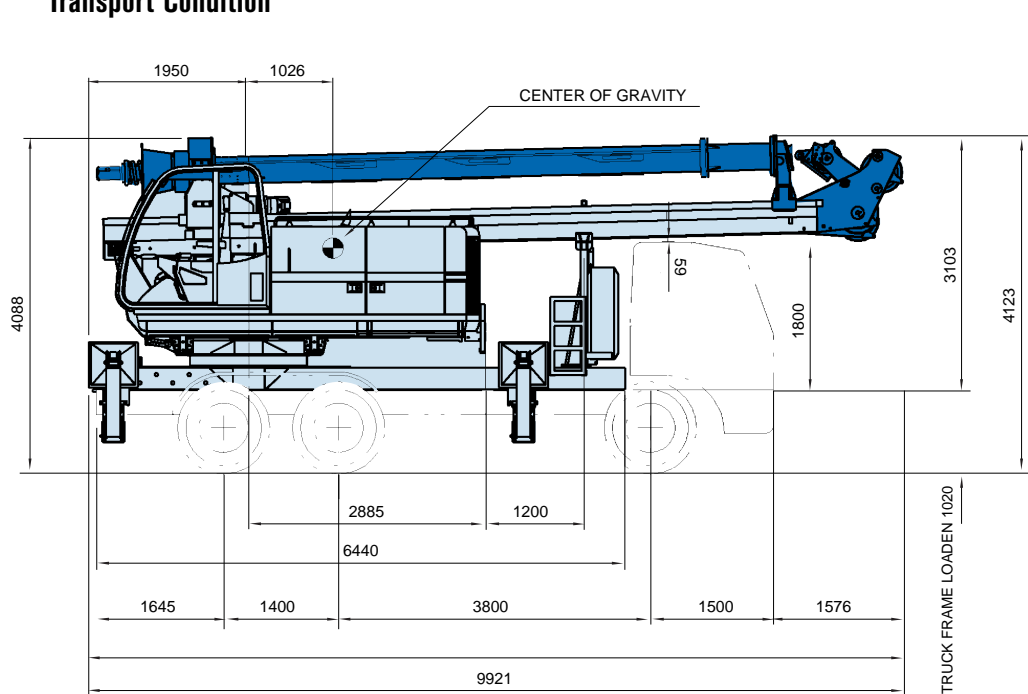





SOILMEC distributes machinery and structures all over the world, supported by SOILMEC subsidiary companies and representative offices as:

SOILMEC LTD - U.K.

SOILMEC MISR S.A.E. Co. - Egypt

SOILMEC (H.K.) Limited - Hong Kong

SOILMEC JAPAN CO LTD - Japan

SOILMEC S.P.A. - Beijing Repr. Office - P.R. China

SOILMEC FAR EAST PTE.LTD - Singapore

SOILMEC EMIRATES - U.A.E.

SOILMEC GULF - U.A.E.

CERTIFIED QUALITY SYSTEM

In 1990 Soilmec was awarded with the certification of its Quality System complying with ISO 9001:2000 standards.



SOILMEC S.p.A.

Ground Engineering Equipment

5819, via Dismano

47023 Cesena (FC) - Italy

tel. +39-0547-319111

fax +39-0547-318548

[http:// www.soilmec.it](http://www.soilmec.it)

e-mail: soilmec@soilmec.it